
POWER UNITS

4JJIX

SPECIFICATION

POWER SOLUTIONS

Isuzu Power Solutions. For those who never stop.

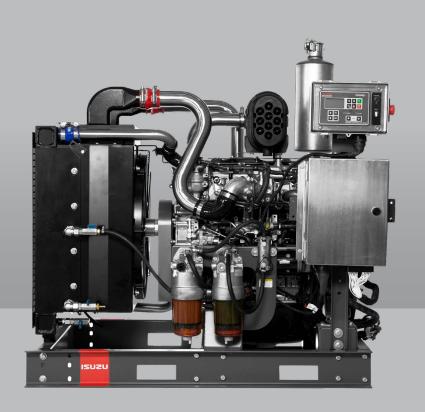







AT A GLANCE

Power Output ■ Max. 95.0 kW / 127.4 hp

(rated) @ 2500 RPM Max. 80.8 kW / 108.3 hp (cont.) @ 2500 RPM

(cont.) @ 2500 Ki 11

Torque Output ■ Max. 408 Nm @ 2000 RPM

Displacement ■ 3.0 L

Bore x Stroke ■ 95.4 x 104.9 mm

O/A Dimensions ■ 977 mm (L) (engine only) ■ 739 mm (W)

■ 842 mm (H)

Dry Weight (engine only)

■ 320 kg

Features

■ Turbocharged intercooled diesel engine

■ Common rail direct injection fuel system

Low noise, low fuel consumption, low maintenance

■ Easy to start

■ Reliable power

■ Water cooled

■ Tier-3 emission compliance

■ Genuine Isuzu engine manufactured in Japan

ENGINE P E R F O R M A N C E 1600 1800 2200 2400 2500 **Engine Power** 1000 1200 1400 2000 Rated (kW / hp) 28.0 / 37.5 39.0 / 52.3 63.0 / 84.5 76.0 / 101.9 85.5 / 114.7 92.0 / 123.4 94.0 / 126.1 95.0 / 127.4 51.0 / 68.4 Continuous (kW / hp) 23.8 / 31.9 33.2 / 44.5 43.4 / 58.1 53.6 / 71.8 64.6 / 86.6 72.7 / 97.5 78.2 / 104.9 79.9 / 107.1 80.8 / 108.3



SPECIFICATIONS

ENGINE

Туре:	Vertical water-cooled 4-cycle Diesel
Model (Manufacturer):	4JJ1-XYBW01 (Isuzu)
Engine Emission:	Tier-3 / Stage-IIIA
Max. Rated Output:	95.0 kW (127.4 hp) @ 2500 RPM
Continuous Output:	80.8 kW (108.3 hp) @ 2500 RPM
Max. Torque	408 Nm @ 2000 RPM
Displacement:	3.0 L
Combustion System:	Direct Injection (Turbocharged Intercooled)
O/A Dimensions:	977 (L) x 739 (W) x 842 mm (H)
Dry Weight:	320 kg
Fuel Consumption:	23.6* L/h @ 100% load

*Based on diesel fuel with a specific gravity of 0.835 kg/m3 at 15°C. Actual value may vary.

POWER UNIT CONFIGURATIONS

1. Starter (STR)

- · Light duty air cleaner system
- Industrial grade exhaust system
- Engine mounting feet
- Heavy duty full aluminium cooling system (max. 45°C)
- 12V complete electrical system (incl. engine harness and stop solenoid)

2. Premium (PRM) Features include STR plus:

- Heavy duty air cleaner system (dual element)
- Air cleaner restriction indicator
- Residential grade exhaust system
- Skid rail chassis mounting
- High performance heavy duty cooling system (50°C +)
- IP65 'PR0' engine controller (advanced watchdog protection + application I/O)
- Remote oil drain kit

KEY BENEFITS

DESIGN

Australian designed and sourced engine mounts and skid

Australian designed heavy duty bar and plate all aluminium radiator

Premium quality air cleaners

Complete electrical engine harness (includes engine stop solenoid, glow plug assisted start, fuel feed pump)

IP65 stainless steel ECM enclosure with LED indicators

CONTROL PANEL

ComAp 'PRO' professional engine controller (advanced engine monitoring protection, plus customer application inputs/outputs, complete event history log, large easy to read display)



ComAp 'PRO' Controller

OPTIONS

Flywheel stub shafts
Auxiliary PTO clutch
Extension skid for mounting of auxiliary items
Premium pump pressure transducer range
4G remote monitoring and control kit
Low coolant alarm protection kit
160W solar battery charging kit
Extension harnesses
Coolant surge tank kit
Vibration isolation mounts



Transducer option





Solar panel option

Clutch option