
POWER UNITS

6HKIT

SPECIFICATION



Isuzu Power Solutions. For those who never stop.

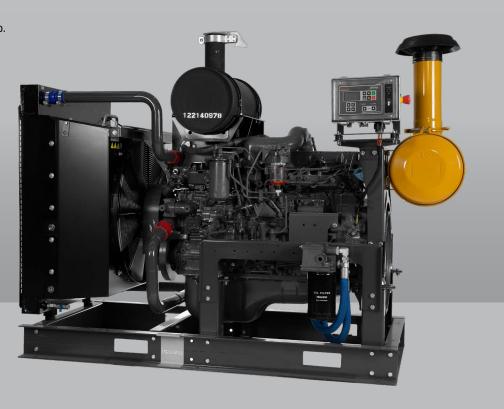





AT A GLANCE

Power Output ■ Max. 143.4 kW / 192.3 hp

(rated) @ 2200 RPM ■ Max. 121.9 kW / 163.5 hp

(cont.) @ 2200 RPM

Torque Output ■ Max. 735 Nm @ 1600 RPM

Displacement ■ 7.8 L

Bore x Stroke ■ 115 x 125 mm

O/A Dimensions ■ 1331 mm (L) (engine only) ■ 847 mm (W)

■ 1403 mm (H)

Dry Weight (engine only)

■ 650 kg

Features

■ Turbocharged diesel engine

■ Mechanical direct injection fuel system

■ Low noise, low fuel consumption, low maintenance

■ Easy to start

■ Reliable power

■ Water cooled

■ Tier-2 emission compliance

■ Genuine Isuzu engine manufactured in Japan

RFORMANCE ENGINE **Engine Power** 1400 2000 2200 1000 1200 1600 1800 Rated (kW / hp) 79.0 / 105.9 102.0 / 136.8 123.0 / 164.9 138.0 / 185.1 141.0 / 189.1 143.4 / 192.3 60.0 / 80.5 Continuous (kW / hp) 51.0 / 68.4 67.2 / 90.0 86.7 / 116.3 104.6 / 140.2 117.3 / 157.3 119.9 / 160.7 121.9 / 163.5



SPECIFICATIONS

Туре:	Vertical water-cooled 4-cycle Diesel		
Model (Manufacturer):	6HK1-TQC01 (Isuzu)		
Engine Emission:	Tier-2 / Stage-II		
Max. Rated Output:	143.4 kW (192.3 hp) @ 2200 RPM		
Continuous Output:	121.9 kW (163.5 hp) @ 2200 RPM		
Max. Torque	735 Nm @ 1600 RPM		
Displacement:	7.8 L		
Combustion System:	Direct Injection (Turbocharged)		
O/A Dimensions:	1331 (L) x 847 (W) x 1403 mm (H)		
Dry Weight:	650 kg		
Fuel Consumption:	41.7* L/h @ 100% load		

*Based on diesel fuel with a specific gravity of 0.835 kg/m3 at 15°C. Actual value may vary.

POWER UNIT CONFIGURATIONS

1. Starter (STR)

- · Light duty air cleaner system
- Industrial grade exhaust system
- Engine mounting feet
- Heavy duty full aluminium cooling system (max. 45°C)
- 12V complete electrical system (incl. engine harness and stop solenoid)

2. Economy (ECY)

Features include STR plus:

- Medium duty air cleaner system (dual element)
- Skid rail chassis mounting
- Mechanical vernier throttle kit
- IP65 'ECO' engine controller (essential watchdog protection)
- Engine RPM sender (MPU)

3. Premium (PRM) Features include ECY plus:

- · Air cleaner restriction indicator
- Air cleaner rain/inlet hood
- High performance heavy duty cooling system (50°C +)
- Engine oil pressure and temperature senders
- IP65 'PR0' engine controller (advanced watchdog protection + application I/O)

KEY BENEFITS

DESIGN

Australian designed and sourced engine mounts and skid

Australian designed heavy duty bar and plate all aluminium radiator

Premium quality Donaldson air cleaners

Complete electrical engine harness (includes engine stop solenoid, glow plug assisted start, fuel feed pump)

CONTROL PANEL

DeepSea 'ECO' economy engine controller (provides essential engine monitoring protection)

ComAp 'PRO' professional engine controller

(advanced engine monitoring protection, plus customer application inputs/outputs, complete event history log, large easy to read display)







ComAp 'PRO' Controller

OPTIONS

Electronic throttle actuator kit

Premium pump pressure transducer range

4G remote monitoring and control kit

Heat Exchanged cooling package

Low coolant alarm protection kit

160W solar battery charging kit

Extension harnesses

Coolant surge tank kit



Transducer option



Heat Exchanger option



Clutch option