
POWER UNITS 66441200 SPECIFICATION



Isuzu Power Solutions. For those who never stop.



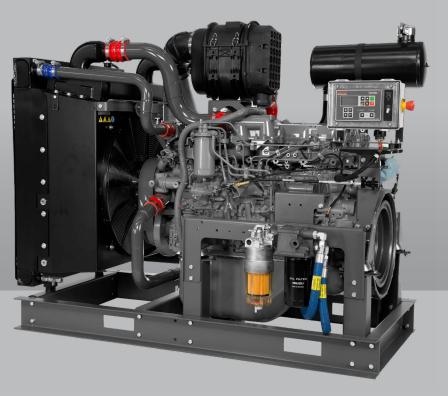

AT A GLANCE

Power Output	 Max. 183.9 kW / 246.6 hp (rated) @ 2000 RPM Max. 156.3 kW / 209.6 hp 	Dry Weight (engine only)	■ 650 kg			
	(cont.) @ 2000 RPM	Features	Turbocharged diesel engine			
Torque Output	Max. 873 Nm @ 1700 RPM	-	 Mechanical direct injection fuel system Low noise, low fuel consumption, low maintenance 			
Displacement	■ 7.8 L	_	 Easy to start Reliable power 			
Bore x Stroke	■ 115 x 125 mm	-	 Water cooled Tier-2 emission compliance 			
O/A Dimensions (engine only)	■ 1332 mm (L) ■ 955 mm (W) ■ 1143 mm (H)		Genuine Isuzu engine manufactured in Japan			

ENGINE PERFORMANCE

Engine Power	RPM	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Rated (kW / hp)	75.0/100.6	85.0 / 114.0	98.0/131.4	105.0/140.8	115.0/154.2	131.0 /175.7	150.0 /201.2	170.0 /228.0	180.0 /241.4	182.0 /244.1	183.9 /246.6
Continuous (kV	/ / hp)	63.8/85.5	72.3 / 96.9	83.3/111.7	89.3/119.7	97.8/131.1	111.4 /149.3	127.5 /171.0	144.5 /193.8	153.0 /205.2	154.7 /207.5	156.3 /209.6



SPECIFICATIONS

ENGINE

Туре:	Vertical water-cooled 4-cycle Diesel				
Model (Manufacturer):	6HK1-XQP03 (Isuzu)				
Engine Emission:	Tier-2 / Stage-II				
Max. Rated Output:	183.9 kW (246.6 hp) @ 2000 RPM				
Continuous Output:	156.3 kW (209.6 hp) @ 2000 RPM				
Max. Torque	873 Nm @ 1700 RPM				
Displacement:	7.8 L				
Combustion System:	Direct Injection (Turbocharged Intercooled)				
O/A Dimensions:	1332 (L) x 955 (W) x 1143 mm (H)				
Dry Weight:	650 kg				
Fuel Consumption:	52.1* L/h @ 100% load				
*Based on diesel fuel with a specifi	c gravity of 0.835 kg/m3 at 15°C. Actual value may vary.				

POWER UNIT CONFIGURATIONS

1. Starter (STR)	 Light duty air cleaner system Industrial grade exhaust system Engine mounting feet Heavy duty full aluminium cooling system (max. 45°C 24V complete electrical system (incl. engine harnes and stop solenoid)
2. Economy (ECY)	Features include STR plus:
	 Medium duty air cleaner system (dual element)
	 Residential grade exhaust system
	 Skid rail chassis mounting
	 Mechanical vernier throttle kit
	 IP65 'ECO' engine controller (essential watchdog protection)
	• Engine RPM sender (MPU)
3. Premium (PRM)	Features include ECY plus:
	 Air cleaner restriction indicator
	• High performance heavy duty cooling system (50°C +
	 Engine oil pressure and temperature senders
	 IP65 'PR0' engine controller (advanced watchdog

- protection + application I/O)
- Remote oil drain kit

KEY BENEFITS

DESIGN

Australian designed and sourced engine mounts and skid Australian designed heavy duty bar and plate all aluminium radiator Premium quality air cleaners Complete electrical engine harness (includes engine stop solenoid, glow plug assisted start)

CONTROL PANEL

DeepSea 'ECO' economy engine controller (provides essential engine monitoring protection) ComAp 'PRO' professional engine controller (advanced engine monitoring protection, plus customer application inputs/outputs, complete event history log, large easy to read display)

OPTIONS

Electronic throttle actuator kit	
Premium pump pressure transducer range	
4G remote monitoring and control kit	
Heat Exchanged cooling package	
Low coolant alarm protection kit	
160W solar battery charging kit	
Extension harnesses	
Coolant surge tank kit	



DeepSea 'ECO' Controller

Heat Exchanger option



Clutch option

* • % 🕅

0-0

ComAp 'PRO' Controller

*Note, some options may not be available on all engine models. Some options are already standard fitment on some engine models. Our goods and services come with guarantees that cannot be excluded under the Australian Consumer Law. For major failures with the service, you are entitled: To cancel your service contract with us; and to a refund for the unused portion, or to compensation for its reduced value. You are also entitled to choose a refund or replacement for major failures with goods. If a failure with the goods or a service does not amount to a major failure, you are entitled to have the failure rectified in a reasonable time. If this is not done you are entitled to a refund for the goods and to cancel and obtain a refund of any nused portion. You are also entitled to be compensated for any other reasonably forseeable loss or damage from a failure in the goods or a service. This warranty is given by Isuzu Australia Limited, ABN 97 006 962 572 (1AL') whose business address is 66 Foundation Road, Truganina, VIC 3029. IAL's telephone number is 1800 035 640. For further information on Isuzu warranties please visit www.powersolutions.isuzu.com.au. The information in this leaflet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL may make changes at any time without notice. Some equipment are availability upon request. ARK006 06/21